





SUITABLE FOR THE TREE PRUNING UP TO 100 MM (3,9 IN). IT DOES NOT HARM THE PLANT, BECAUSE IT CUTS SHARPLY AND PRECISELY WITHOUT UPROOTING THE BRANCH. THE BAR'S BLADES IN HB450 GRANT RESISTANCE AND EXTENDED USEFUL LIFE.

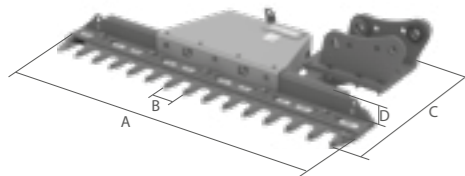

	TONS (LB)	2,5 - 12,0 (5512 - 26455)		4,0 - 14,0 (8818 - 30865)		
		MOD.	BTC 50-150	BTC 50-180	BTC 100-160	BTC 100-190
<b>A</b>	MM (IN)	1500 (59)	1800 (71)	1600 (63)	1900 (75)	2200 (86,6)
<b>B</b>	MM (IN)	50 (2)	50 (2)	100 (3,9)	100 (3,9)	100 (3,9)
<b>C</b>	MM (IN)	670 (26,4)	670 (26,4)	810 (31,8)	810 (31,8)	810 (31,8)
<b>D</b>	MM (IN)	130 (5,1)	130 (5,1)	155 (6,6)	155 (6,6)	155 (6,6)
W/O COUPLER	KG (LB)	175 (386)	190 (419)	240 (530)	260 (574)	285 (629)
MAX.	BAR (PSI)	250 (3626)	250 (3626)	250 (3626)	250 (3626)	250 (3626)
MIN.	L/MIN (GAL/MIN)	40 (11)	40 (11)	50 (11)	50 (11)	50 (11)
MAX.	L/MIN (GAL/MIN)	50 (13,2)	50 (13,2)	60 (15,8)	60 (15,8)	60 (15,8)
BLOWS PER MINUTE	N.	195	195	86	86	86

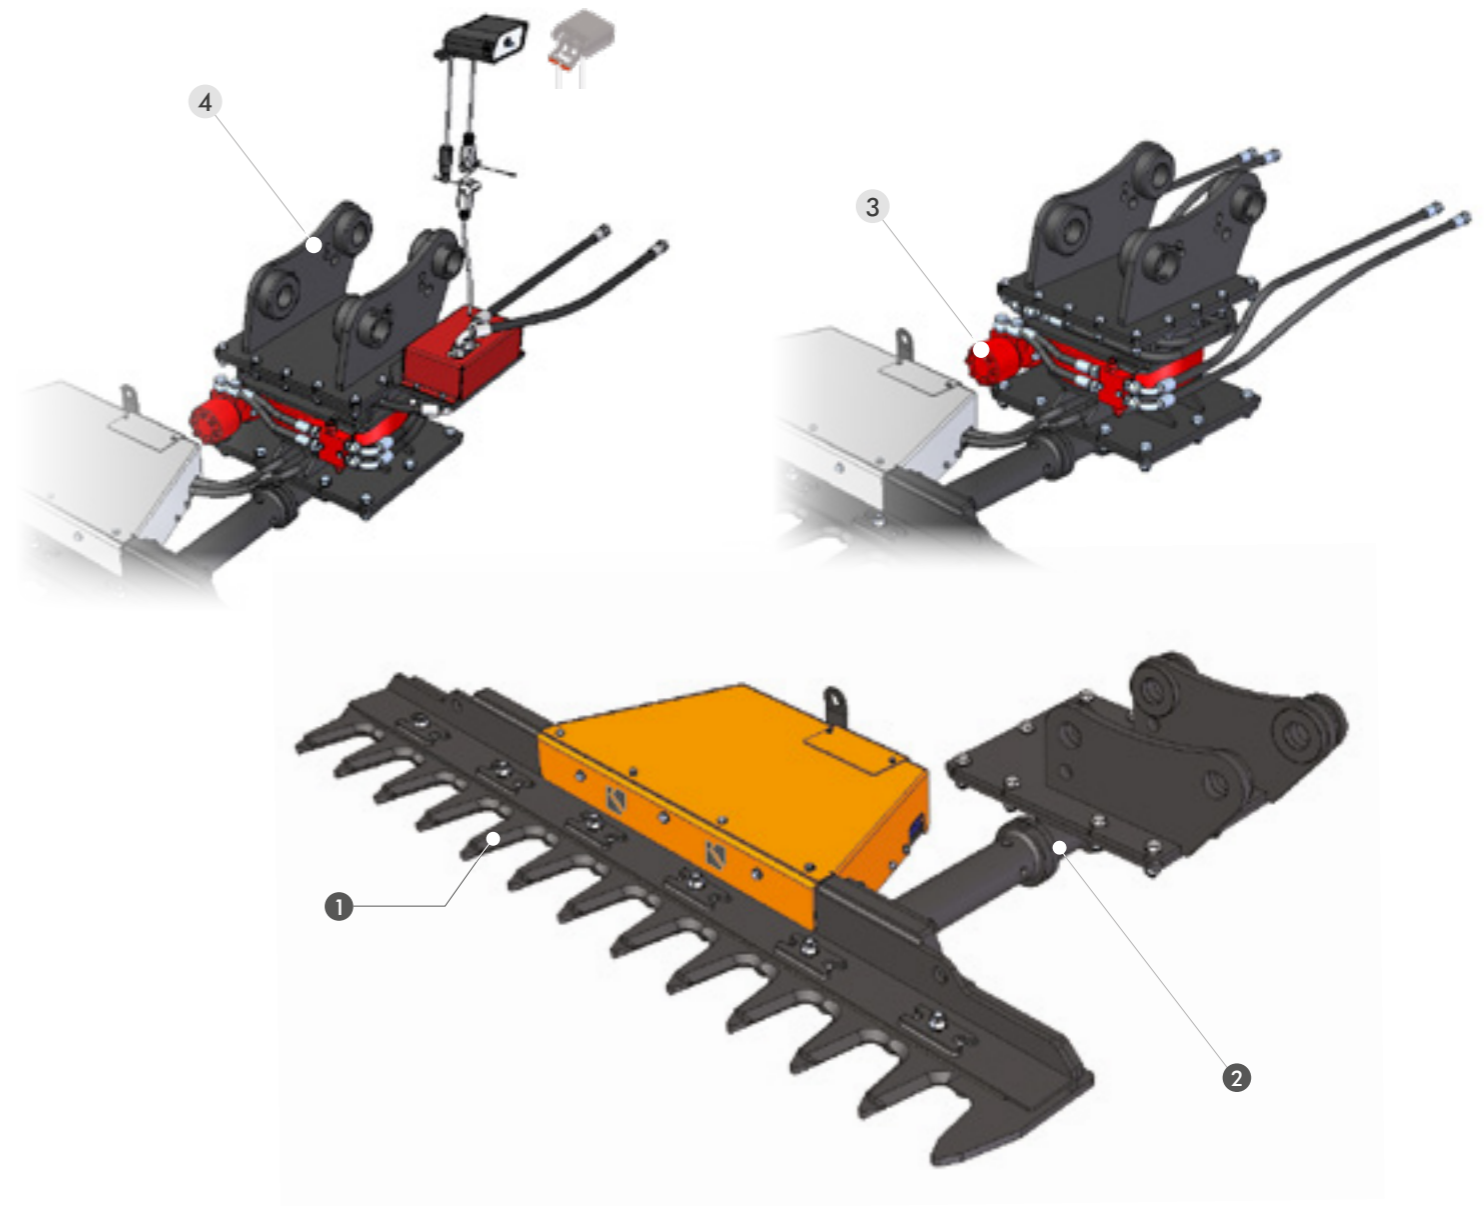

## STANDARD TECHNICAL FEATURES

- HB450 BLADE**  
HB450 BLADES FOR A HIGHER RESISTANCE TO WEAR.
- REVOLVING JOINT**  
THE TOOTHED FLANGE NEXT TO COUPLING AREA ALLOWS TO SETTLE THE TILTING DEGREE ACCORDING TO THE CUSTOMER'S NEED.

## OPTIONAL

- HYDRAULIC SLEWING RING 360° WITH 4 PIPES HYDRAULIC JOINT**  
IT ORIENTS THE BRANCH-CUTTER BAR FOR DIFFERENT NEEDS AND IT ALLOWS TO CUT IN BOTH DIRECTIONS.
- HYDRAULIC SLEWING RING 360° WITH 2 PIPES HYDRAULIC JOINT**  
IT ORIENTS THE BRANCH-CUTTER BAR FOR DIFFERENT NEEDS AND IT ALLOWS TO CUT IN BOTH DIRECTIONS. CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB.