# **Dynapac CA6500PD**



## Single drum vibratory rollers



#### **Technical data**

Masses Masses	
Operating mass (incl. ROPS)	20600 kg
Operating mass (incl. Cab)	20800 kg
Module mass (front/rear)	13850 kg/6950 kg
Max. operating mass	21000 kg

Dimensions	
Drum width	2130 mm

Traction	
Speed range (Dual/TC/AS)	4/6/7/11 km/h
Vertical oscillation	±9°
Tyre size (12 ply)	23,1 x 26 AW
Theor. gradeability	42 %
Number of pads	130
Pad height	102 mm
Pad area	146 cm <sup>2</sup>

₩.	Compaction	
	Nominal amplitude (high/low)	2.1 mm/0.8 mm
	Vibration frequency (high/low amplitude)	29 Hz/30 Hz
	Centrifugal force (high/low amplitude)	360 kN/150 kN

Engine	
Manufacturer/Model	Deutz TCD6,1L6 (IIIB/4i)
Туре	Water cooled turbo Diesel
Rated power, ISO 14396	150 kW (204 hp ) @ 2200 rpm
Fuel tank capacity	272

Engine	
Manufacturer/Model	Deutz TCD2012L06 (IIIA/3)
Туре	Water cooled turbo diesel
Rated power, ISO 14396	150 kW (204 hp ) @ 2200 rpm


$\Diamond$	Hydraulic syst	em
	Driving	Hydrostatic
	Vibration	Hydrostatic
	Steering	Hydrostatic
	Service brake	Hydrostatic in forward and reverse lever.
	Parking/ Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.


# **Dynapac CA6500PD**



## Single drum vibratory rollers

#### **Technical data**

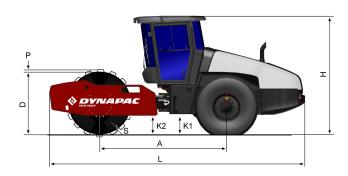

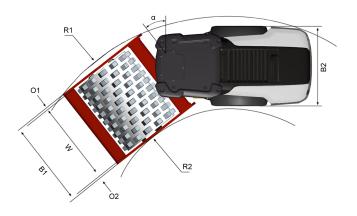

Dimensions	
A. Wheelbase	3100 mm
B1. Width, front	2380 mm
B2. Width, rear	2130 mm
D. Drum diameter	1518 mm
H1. Height, with ROPS/cab	2890 mm
H2. Height, w/o ROPS/cab	2130 mm
K1. Ground clearance	450 mm
K2. Curb clearance	450 mm
L. Length	6240 mm
O1. Overhang, right	125 mm
O2. Overhang, left	125 mm
P. Pad height	102 mm
R1. Turning radius, outside	5800 mm
R2. Turning radius, inside	3300 mm
S. Drum shell thickness	34 mm
W. Drum width	2130 mm
α. Steering angle	±38°